


Digital Macro Vickers Hardness Tester w/ built-in Printer 45

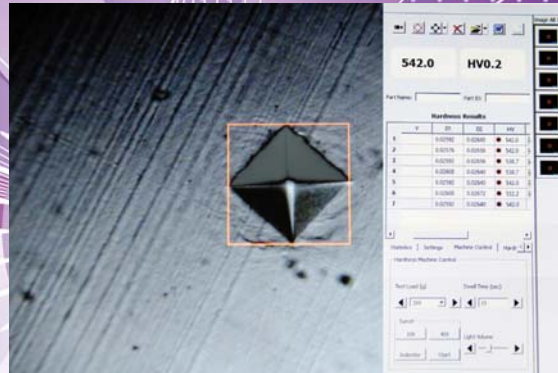

Main Accessories:

- Large test table
- "V" Shape test table
- 10X Digital Micro Lens
- Level
- Adjustable Screw
- Vicker Hardness Block
- RS232 Interface

Specifications:

Test Forces:	9.807, 19.61, 24.52, 29.42, 49.03, 98.07, 196.1, 249.2, 490.3 N 1, 2, 2.5, 3, 5, 10, 20, 30, 50kgf
Carriage Control:	(Load/Dwell/Unload)
Amplification of the Microscope:	100x 200x
Dwell Time of the Test Force:	(0-60)s
Min. Graduation Value of the Testing Drum Wheel:	0.125µm
Testing Field:	1HV-2967HV
Output:	Built-in Mini Printer RS-232
Max. height of the specimen:	170 mm
Max. width of the specimen:	130 mm
Objective:	10x 20 x 40x selectable
Light source:	Cold light source
Power Supply:	110V/220V,60/50Hz
Dimension:	535X225X580mm
Weight:	60 kg



Model No. 900-398A-Includes Video Cam, Adapter and Manual Measurement Software

Model No. 900-398B-Includes Video Cam, Adapter and Auto-Measurement Software

Our advanced line of Macro Vickers hardness testers are state-of-the-art, precise testing systems suitable for hardness analysis of metallic specimens in metallography laboratories or production environments.

The Phase II macro-vickers hardness testers are versatile and user-friendly systems.

Designed for the accurate hardness testing of small precision parts, thin materials, case hardened layers and all sorts of steel components. The Phase II 900-398 is our macro-vickers hardness tester, covering the load range from 1kg to 50kg, with digital technology. Conforming to ASTM E-384/92 vickers hardness testers standards, the 900-398 digital vickers hardness tester will offer unmatched repeatability. A perfect rugged performer suited for any environment, the Phase II vickers hardness testers are offered with a 5 year warranty and free lifetime technical support.

The 900-398 Vickers Hardness Tester is engineered to produce a clear indentation and a more precise measurement. By means of a load cell, closed circuit system for control, the CPU controls testing force to load/dwell/unload, allowing for the highest degree of accuracy. The large LCD shows the measuring methods, the testing force, the indentation length, hardness value, the dwell time of the testing force as well as the number of the measurement on its screen.

All information such as diagonal lines length of indentation, hardness values, data statistics and hardness conversions can be displayed on the LCD.

The tester can be adapted with a ccd camera for operation and data control via pc.